BuilditEco RMAX EPS Cavity Batten 40mm x 25mm

(*Fastened through sheathing and into stud with approved batten fixing clouts min 50mm. ThermaWall panel fastened through batten, sheathing and minimum 40mm into framing timber*)

BuilditEco ThermaWallPlus Pre-meshed board - 75mm Thickness

(*Contains Perform Guard, an exclusive termite resistant additive. Total R-Value of system R 2.83 Summer R 2.99 Winter*)

Bradford Enviroseal ProctorWrap Residential Wall

(*All Joints Taped with ProctorWrap HighTack Tape. All penetrations sealed with ProctorWrap SLS Flexi. Extend sarking down into cavity closure*)

Dulux Acratex System

- DULUX AcraTex RenderWall P400 - 2 Coats 4mm total thickness
- DULUX AcraTex – AcraPrime 501/1
- DULUX AcraTex – Coventry Coarse - colour must have a Light Reflectance Value of 40%
- DULUX AcraTex 955 AcraShield Matt - 2 Coats

OSB Sheathing

(*Fixed to entire wall Exterior*)

90x45 min. MGP10 Pine - LVL Wall Framing

(*LVL wall framing to wet area walls that are to take Wall tiles and walls longer than 4m in length*)

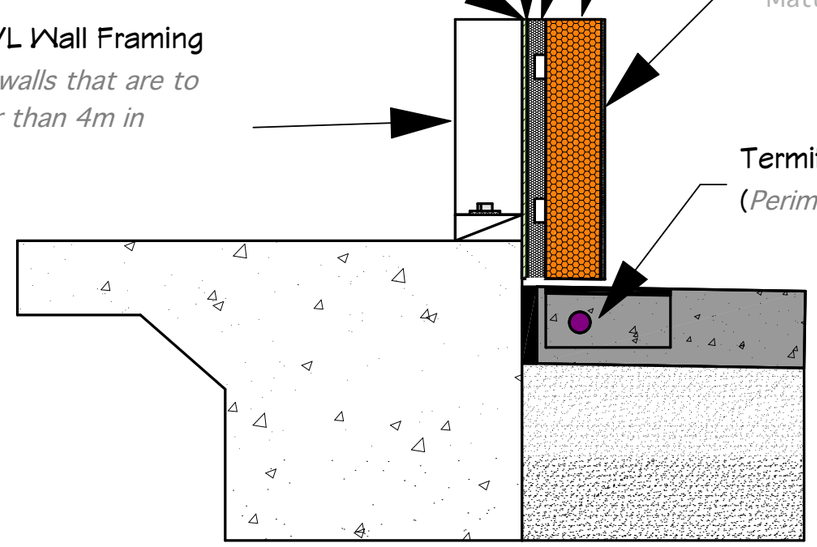

Termite Treatment

(*Perimeter reticulation system*)

Apollo Improvements - Build it Eco ThermaWall Plus

Exterior Wall Best Practice